
ED-KDS215

21.5inch Kitchen Display System







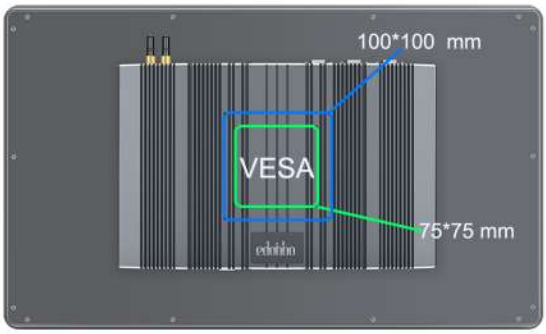

Key Feature of KDS215

Intuitive Touch | Bright light | Clarity & Visuals | IP65 Waterproof Dustproof

System Streamlines the kitchen workflow

Robust All Metal Body

Multi-sizeTouch-screen options

VESA-Wall-Mounted Options

Multi-Interface

SPECIFICATIONS

General Information-KDS215

Display & Touch	
LCD	**11.6/15/15.6/18.5/21.5/32 inch Industrial TFT LCD**
Touchscreen	Main screen 10 point Capacitive touch screen (default)
Resolution	1920×1080(11.6″)/1024×768(15″)/1920×1080(15.6″)/1920×1080(18.5″) 1920×1080(21.5″)/1920×1080(23.8″)/1920×1080(32″)
Brightness	250 cd/m²-300 cd/m²
Windows System OR Android System	
Processor	Intel Celeron N97 /J4125 / J6412 / I3 / I5 / I7
Processor	RK3568 / RK3588 / RK3576
System Memory	2G/4G/8G/16G RAM
Storage Device	32G/64G128G/256G SSD
OS support	Android11/12/13， Windows 10/11 ， POS Ready7, Linux
I/O Expansion	
Serial Port	1*COM(RS232) （option）
Standard USB Port	2*USB3.0，4*USB2.0
LAN Port	10/100/1000 Mb x 1
Display Port	1*HDMI,1*VGA
VESA-Wall-Mounted	75mm*75mm/100mm*100mm
Audio	1*Mic-in, 1*Line-out
Power DC-IN	Input AC 100~240V/50~60hz, Output DC12V/5A
Built-in Options (Option)	
WIFI	M.2 WiFi/BT module
Speaker	Built-in speaker
Material	
Housing Material	Aluminum Die Casting Alloys
Color	Black
Working environment	
Temperature	0°C~60°C
Humidity	10%~90%