

ALL-IN-ONE POS MACHINE

(Model No:ED116)

- Windows or Android OS
- 11.6-inch Capacitive Touch Screen， Support Multi-touch
- Various Customization Options （Scanner/Printer/NFC/Secondary Display）
- Compact machine, suitable for small stores, mobile food trucks, booths.



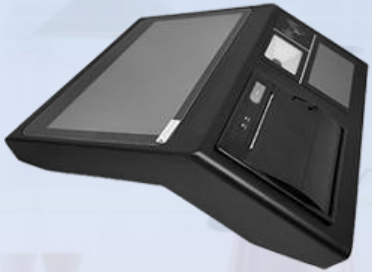





Specification	
ED116-11.6 Inch Touchscreen ALL-IN-ONE POS System	
Processor	Windows: WIN:J4125/J6412 Core i3/i5/i7 /N97 (Optional) Andorid: RK3268/RK3588 (Optional)
Cooling	Fanless
System Memory	Windows:: DDR3 4/8/16G(Optional) Andorid: Ram 4/8G (Optional)
Storage Device	Windows: SSD 128/256/512G (Optional) Android: Flash 16/32G
OS support	Windows 10/11, POS Ready7, Linux,Android 11
I/O port	1* power button DC in *1 Serial(DB9 male)*1 VGA(15Pin D-sub)*1 HDMI*1(Core series) LAN:RJ-45*1 USB(2.0)*2 USB(3.0)*2 (Varies according to motherboard) Audio out*1 MIC IN*1
Thermal printer(Option)	
Printing Method	Direct Thermal
Printing Speed	260mm/s
Printing Width	Direct Thermal 80mm.
2D Scanner(Option)	
Interfaces	USB,RS-232 Option
Data Capture	1D: Code 11, Code 128, Code 39, GS1-128,(UCC/EAN-128), AIM 128, ISBT 128, Codabar, Code 93, UPC-A/UPC-E, Coupon, EAN-13, EAN-8, ISSN. ISBN, Interleaved 2/5, Industrial 2/5, ITF-14, ITF-6, Standard 2/5, China Post 25, MSI-Plessey, Plessey, GS1 Databar, GS1 Composite, Databar(RSS) 2D: PDF417, QR Code, Data Matrix, Aztec
Buil-in Options	
MSR	ISO 1,2,3 Tracks
WIFI	M.2 WiFi/BT module
Speaker	Built-in speaker
Environmental	
Operating Condition	0°C - 50°C, 20%RH - 90%RH
Storage Condition	Below zero 20°C - 70°C, 10%RH - 90%RH