




10.1 inch Android All in one machine IP65

Aluminum Alloy Case

(Model NO: ED-TP101)

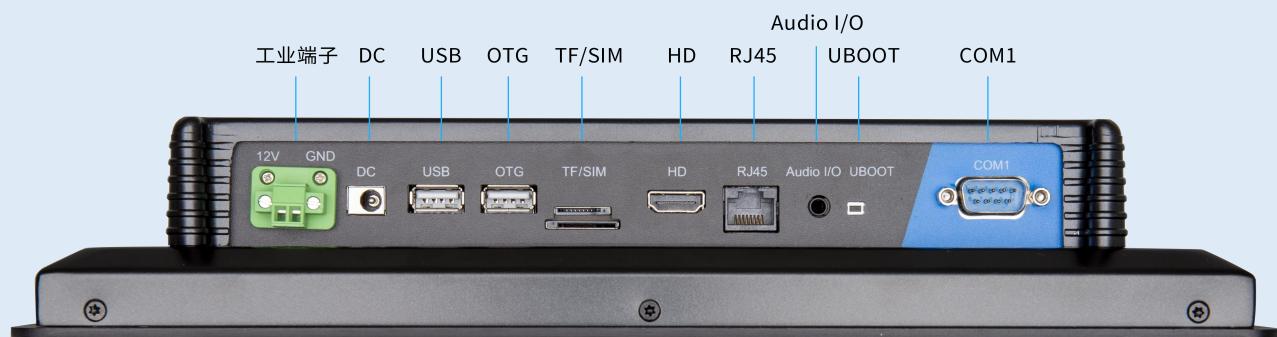



Specification:

Screen parameters	size	10.1 "
	Resolution	1280×800
	Perspective	85/85/85/85 (L/R/U/D)
	colour	Chroma: 16.7M
	Brightness (standard value)	Brightness: 300cd/m2
	Contrast	600:1
	Response time	6.5ms
	Display area	216.576(V) X135.36(H)mm
	Pixel pitch (mm)	0.1692(H) X 0.1692(V)
touch screen		
	Touch screen type	Capacitive touch screen
	Resolution	500DPI
	Input	Handwriting or capacitive pen
	Surface hardness	7H
Hardware Configuration	calibration	stand by
	CPU	RK3288 Cortex-A17 quad core processor , 1.8GHz
	GPU	Mali400MP2
	RAM	2G(DDR3)
	storage	EMMC 16G
	operating system	Android 7.1
	3G module	PCI-E standard interface ,support China Mobile, China Unicom, Telecom (optional)

	4G module	PCI-E standard interface ,support China Mobile, China Unicom, Telecom (optional)
	WiFi	2.4G
	Bluetooth	BT4.0
	GPS	Optional
	MIC	Optional
	RTC real time clock	stand by
	Timer switch	stand by
	System Upgrade	Support local SD, USB upgrade
interface	DC port	1*DC 2.0
	HDMI	Support HDMI data output, maximum support 1080P
	USB-OTG	1
	USB-HOST	2*USB2.0
	RJ45 Ethernet	1*10M/100M/1000M adaptive Ethernet
	SD/TF	TF data storage, maximum support 32G
	Headphone holder	3.5mm standard interface
	SMI card	SIM card interface standard interface supports various formats (depending on 3G / 4G module)
	RS232	2*RS232
	RS485	Optional
	RS422	Optional
	GPIO	Optional
Product reliability	Operating temperature	-10 °C to 60 °C
	Storage temperature	- 20 °C to 70 °C
	humidity	Humidity: 95% Non-Condensing

	Mean time between failures (MTBF)	7*24H
power supply	Power consumption (maximum)	18W
	Power consumption (standby)	
	power input	AC 100-240V 50/60Hz passed CCC certification, CE certification
	Power Output	DC12V / 4A

Installation

